


# LIFTING TECHNOLOGY PIT JACK

**MPJ 16.5/1200 3S TA**  
VP 454282

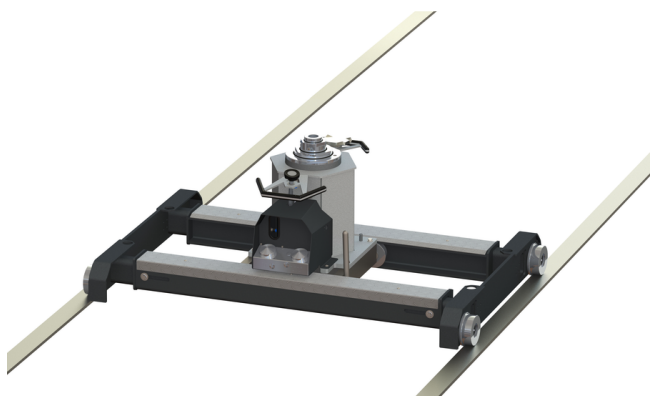

## MPJ 16.5/1200 3S TA VP 454282

The axle and transmission jack lifts up to 16.5 t. The axle and transmission jack, with triple telescopic cylinders (max. stroke 1200 mm), runs along bottom positioned rails. Load-free, a compressed air speed control function ensures fast movement of the two telescopic segments as well as fast retraction of the piston rods. The equipment also includes an air motor with foot pedal control for lifting the piston rod under load.

### PRODUCT DETAILS/ACCESSORIES

3-stage telescopic, rail-guided, floor-running

#### Description:

Automatic axle and transmission jack with pneumatic motor and fast control in slim design specifically for dismantling assemblies and lifting vehicles up to 16.5 t

#### Control:

- Unique synchronised telescopic lifting cylinder for quick load lifting with fast control
- Efficient fast control for UP and DOWN movement Integrated as standard
- Precision, user-friendly foot control using compact and robust operating unit for quick lift and load lift
- Delicate and precision lowering of the pit jack with tried & tested system with integrated dead man's control
- Telescopic stages protected against corrosion thanks to the Venturi effect (separation of hydraulic oil and airflow)
- Integrated cover to protect against unintentional operation

#### Design:

- Precision floor-runnable, rail-guided pit jack for easy movement (needle bearings included as standard) of built-on units, including while loaded

- Telescopic carriage for precision adjustment of pit jack lane width to fit the rails in the work pit
- Precision-guided track rollers (flange guided)
- Optional wall-guided rollers with flat steel possible
- Secure jack holding brake in transverse direction across the work pit
- Integrated inspection window for checking oil quality and quantity of the pit jack
- Optimised removal of the dismantled units thanks to low construction height of the jack due to ideal arrangement of the lifting unit in the carriage
- With its non-slip coating the carriage can be used as a secure working platform for ergonomic reasons
- Corrosion-resistant piston rods thanks to self-lubrication
- High-quality powder-coating protects against corrosive liquids and elevates quality look and feel on a lasting basis

#### Scope of delivery:

- Pit jack with hydro-pneumatic automatic control system
- Carriage with four interior flanged rollers for rails
- Standard support lugs 120 x 120 mm
- Operating instructions
- EC conformity certificate
- Colour: Jack base frame RAL 7040
  - Attachments and carriage RAL 7016

### TECHNICAL DATA

Load capacity (CE)	16,500 kg
Fast stroke power	600 kg
Stroke distance	1200 mm
Lifting levels	3
Min. pick-up height	674 mm
Max. lifting height	1874 mm
Slide rail width inner dimensions	825 1738 mm
Carriage adjustable range	230 mm
Roller rest width	44 mm

# LIFTING TECHNOLOGY PIT JACK

**MPJ 16.5/1200 3S TA**  
VP 454282



## TECHNICAL DATA

Roller rest incline	0 %
Min. slide rail (W x H)	50 x 10 mm
Max. parallelism deviation slide rails	10 mm
Roller diameter (at the flange)	133 (148) mm
Support diameter inside/outside	45/80 mm
Piston rod diameter	80/115/170 mm
Oil quantity/quality	27.5 l / HLP-D 10
Drive	350 l/min. 7-10 bar
Operating pressure	190 bar
Weight	572 kg

## ACCESSORIES

### ACCESSORIES - CARRIAGE

VZ 975920	Jack-mounted compressed air maintenance unit
VZ 975614	Rollers on flat steel, wall-guided -EXTRA CHARGE-
VZ 975744	Pneumatic manual control cylinder with magnetic bracket
VZ 975919	Precision-control foot lever

### ACCESSORIES - TRAVERSES, SUPPORT BRIDGES, SUPPORT SYST.

VZ 975670	Self-locking axle lifting beam with 14.5 t support system MODEL: SAT 14.5-760
VZ 975813	Self-locking axle lifting beam with 14.5 t support system MODEL: SAT 14.5-820
VZ 975622	Self-locking axle lifting beam with 14.5 t support system MODEL: SAT 14.5-910 STOCK
VZ 975741	Self-locking axle lifting beam with 14.5 t support system MODEL: SAT 14.5-910L
VZ 975743	SAT Rollers Retrofit Kit, Spring Mounted, with Plastic Rollers
VZ 975814	SAT Wheel Deflector Plates (2 pcs)
VZ 975820	Spacer Block for Support Systems SAT (65 x 110 x 320 mm)
VZ 975903	Axle lifting beam up to 15 t Adjustment range max. 1010 mm MODEL: AT 15
VZ 975688	Axle Traverse Length Variation
VZ 975906	Axle traverse Long for busses, com. vehicles, 16.5t load cap. MODEL: AT 16.5 L1500
VZ 975696	Axle Crossbar Load Capacity 3.5 t Model: ATV 3.5
VZ 975925	Support bridge for axle traverses up to 14.5 t load capac. MODEL: TAB 15
VZ 975326	Support Bridge AB w/o Centre Cut-Out up to 14,5 t Load Cpc. MODEL: AB 15
VZ 975686	Support System Version D/F
VZ 975687	Support System Version E

### ACCESSORIES - LOAD LIFTING PADS, LIFTING PADS, EXTENDERS, SUPPORT TUBES

VZ 975280	Narrow Lifting Pad, 20 t Load Capacity, galvanized, up to 100 mm (Pin Diameter 45 mm)
VZ 975285	Large Lifting Pad, galvanized, Load Capacity 20 t MODEL: GP 175/20
VZ 975283	Large Lifting Pad, galvanized, Load Capacity 16.5 t MODEL: GP 220

VZ 975569 Pads with mushroom support N with pin diameter 45 mm MODEL: PS-N

VZ 975409 Wooden Lifting Pad, 6 - 16 t Load Capacity, Prismatic Design, MODEL: HP 06-16

VZ 975287 Lifting Pad w. Rubber Surface, 11 t Load Capacity MODEL: RPG 10

VZ 975289 Plug-In Extender, L = 100 mm, MODEL: ZS 100/45

VZ 975290 Plug-In Extender, L = 150 mm, MODEL: ZS 150/45

VZ 975410 Plug-In Extender, L = 200 mm MODEL: ZS 200/45

VZ 971221 Support Plate Extension 100 mm galvanized (2 pcs.) Diameter of supports 35 mm

VZ 975330 Support Tube L = 400 mm, Load Capacity: 20 t (Pin Diam. 45 mm)

VZ 975331 Support Tube L = 600 mm, Load Capacity: 20 t (Pin Diameter 45 mm)

VZ 975571 Support Tube L = 800 mm, Load Capacity: 15 t (Pin Diameter 45 mm)

VZ 975414 Spacer Block for Support Systems TAB (100 x 140 x 450 mm)

VZ 975732 Gearbox Plate, Load Cpc. 1.0t Model: GP 1000

VP 975915 Gearbox Mounting Tool with swivelling flat supports MODEL: GMT 800

VZ 975916 Swivel supports for GMT 800 w. locking function

VZ 975917 Angle clamp supports for GMT 800 with rubber pad

VZ 975918 Semicircular flex supports for GMT 800 with rubber pads

VZ 975611 Pit crossing continuously adjustable for pits w/o wheel guides

VZ 975612 Pit crossing continuously adjustable for pits with wheel guides

VZ 975613 Railings for pit crossing continuously adjustable

### SUPPLEMENTARY CHARGES

VT 998106 Transportkosten Grubenheber Abstütssystem, Getriebeplatten

VT 998108 Transportkosten Abstütssystem, Getriebeplatten

VM 996148 Montagekosten Grubenheber

VV 997600 Packaging Floor-running jack not stackable -EUROPE/OVERSEAS-

VV 997601 Packaging Lifting beams, gearbox plates, stackable -EUROPE/OVERSEAS-